


valspar®



Exterior Paint



Bridges Hairline Cracks

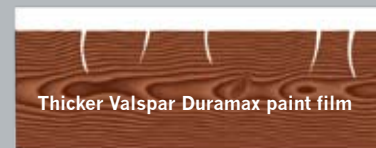

Thicker Valspar Duramax paint film

Cracked substrate covered with Valspar Duramax.




Ordinary house paint film

Cracked substrate covered with ordinary house paint.

- Advanced Crosslinking Technology for the most durable, innovative exterior paint finish
- Apply as low as 35° F (45° F for semi-gloss)
- Thickest one-coat coverage
- Self-priming
- 100% premium acrylic


- Triple action mold, mildew and algae resistant finish
- Maximum UV protection
- Hides minor surface defects and cracks
- Lifetime warranty
- Available in flat, satin & semi-gloss

UV rays and moisture are unable to penetrate the crosslinking polymer network.

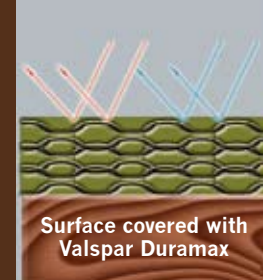

Surface covered with Valspar Duramax

UV rays and moisture penetrating the coating of ordinary house paint.

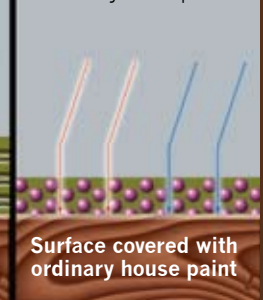

Surface covered with ordinary house paint